


enblock C Parallel Box

| Electrical Characteristics                                 |                                                               |
|------------------------------------------------------------|---------------------------------------------------------------|
| Voltage Range                                              | 42 to 58.8 V <sub>DC</sub>                                    |
| Max. Charge/Discharge Current <sup>1)</sup>                | 119A                                                          |
| Max. Charge/Discharge Power                                | 5 kW                                                          |
| Communication Interface                                    | CAN 2.0B                                                      |
| Communication Method                                       | Bolting to the busbar(Power)<br>RJ45 Connector(Communication) |
| User Interface                                             | LEDs for Normal and Fault operation                           |
| Protection Features                                        | Over Voltage / Over Current / Short Circuit                   |
| Scalability<br>(Total Energy, Max. Charge/Discharge Power) | Max. 2 in parallel<br>(Max. 26kWh, Max. 5kW)                  |

| Operating Conditions                |                         |
|-------------------------------------|-------------------------|
| Installation Location               | Indoor / Outdoor        |
| Operating Temperature               | 14 ~ 113°F (-10 ~ 45°C) |
| Operating Temperature (Recommended) | 59 ~ 86°F (15 ~ 30°C)   |
| Humidity                            | 5 ~ 95%                 |

| Mechanical Characteristics |               |                      |
|----------------------------|---------------|----------------------|
| Dimensions                 | Width         | 8.5 inch (216 mm)    |
|                            | Height        | 6.14 inch (156 mm)   |
|                            | Depth         | 4.74 inch (120.5 mm) |
| Weight                     | 4.4 lb (2 kg) |                      |

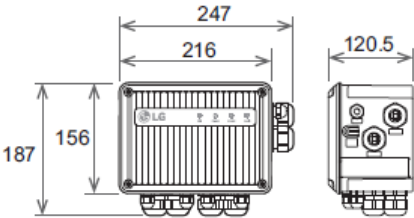

| Available Install Combination |                             |
|-------------------------------|-----------------------------|
| • RESU3.3 – RESU3.3           | • enblock C10 – enblock C10 |
| • RESU3.3 – enblock C6.5      | • enblock C10 – enblock C12 |
| • RESU3.3 – enblock C10       | • enblock C12 – enblock C12 |
| • enblock C6.5 – enblock C6.5 |                             |
| • enblock C6.5 – enblock C10  |                             |
| • enblock C6.5 – enblock C12  |                             |

※ Product specification may change without notice.  
※ RESU3.3 is no longer available in the market.

1) Peak Current excludes repeated short duration (less than 10 sec. of current pattern).



HQ: Parc-1 LG Energy Solution, 108, Yeoui-daero, Yeongdeungpo-gu, Seoul, 07335, Korea  
<https://www.lgessbattery.com/> <https://www.lgensol.com>